

installing your wood burning heater




SAFETY NOTICE

If this unit is not properly installed, a house fire may result. For your safety, follow the installation manual. It is very important that you observe the minimum clearances shown below.

IMPORTANT

Single wall stove pipe must maintain an 18" clearance to a combustible surface (wall or ceiling). When this clearance is maintained the unit may be placed directly beneath the pipe and turned parallel to a wall or perpendicular to a corner and it will maintain its clearances.

MINIMUM CLEARANCES

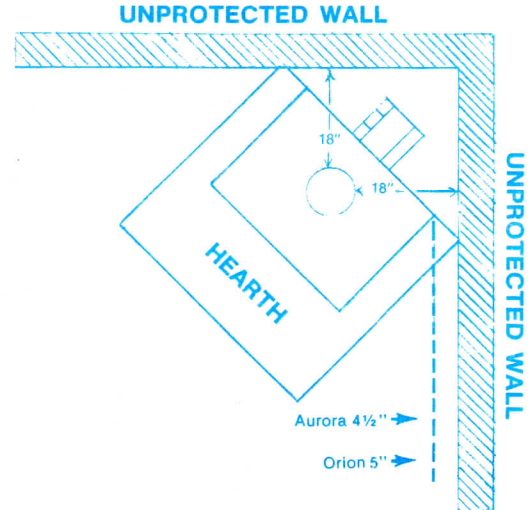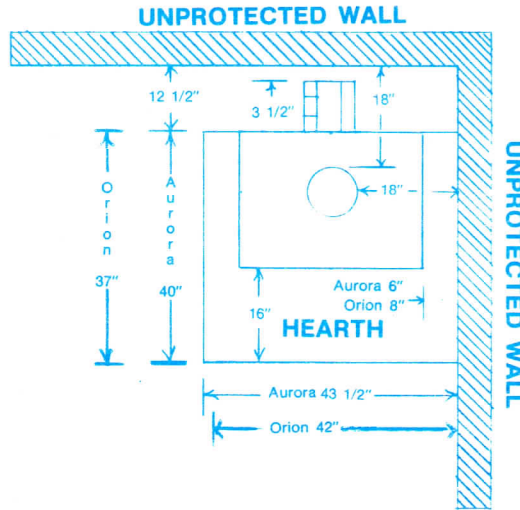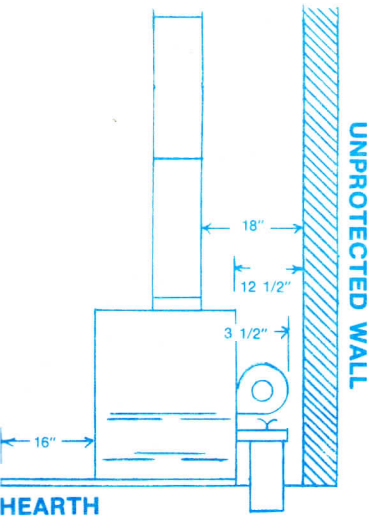

MINIMUM HEARTH PROTECTION

The minimum hearth protection can be attained using 3/8" asbestos millboard.

No stove should be installed on a combustible surface because of the possibilities of falling hot ashes. The stove must set on a non-combustible pad of 3/8 inch or more in thickness. We recommend asbestos mill board, or a U.L. listed equivalent, however the appearance may be enhanced

by adding other non-combustible materials such as stone, brick or tile. The covering must extend 16 inches in front of the stove and a minimum of six or eight inches to either side of the stove.

LISTED FLOOR PROTECTION SYSTEM

